



Client

Date

Qty

Project

Type

PO#

LS-ARCH-EXT-120V-LIN



Spécifications

Model	1.22M	610mm	305mm
Power	40W	20W	12W
Voltage	120V-240V	120V-240V	120V-240V
Lumens	1700lm(RGB) 2920lm(CCT)	900lm(RGBW) 1500lm(CCT)	500lm(RGBW) 840lm(CCT)
CCT	2.7K,3K,3.5K,4K,5K, RGBW	2.7K,3K,3.5K,4K,5K, RGBW	2.7K,3K,3.5K,4K,5K, RGBW
Dimensions (mm)	L1220xW78x70	L610xW78x70	L305xW78x70
Weight	5.6Kg	3.6Kg	2.1Kg
Control	DMX512,0-10V	DMX512,0-10V	DMX512,0-10V
Operating Temperature	-40°C à 55°C	-40°C à 55°C	-40°C à 55°C
Protection	IP66	IP66	IP66

Description

- For building façade lighting, sign, etc.
- Robust aluminium chassis
- CCT: 2700K, 3000K, 3500K, 4000K, 5000K or RGBW.
- 2920 Lumens (CCT), 1700 Lumens (RGBW).
- Control: 0-10V, DMX512.
- Multiple beam angles available to suit every application.
- Black, white, silver or RAL finish.
- Inside, outside.

Order Code

LS-ARCH-EXT-120V-LIN-

Size	CCT	Beam angle	Finish
305mm	2.7K	15°	BK (Black)
610mm	3K	30°	WH (White)
1220mm	3.5K	45°	SI (Silver)
	4K	60°	
	5K	20x40°	
	RGBW	15x55°	




Client		Date		Qty	
Project		Type		PO#	

LS-ARCH-EXT-120V-LIN


Dimensions

Version DMX:

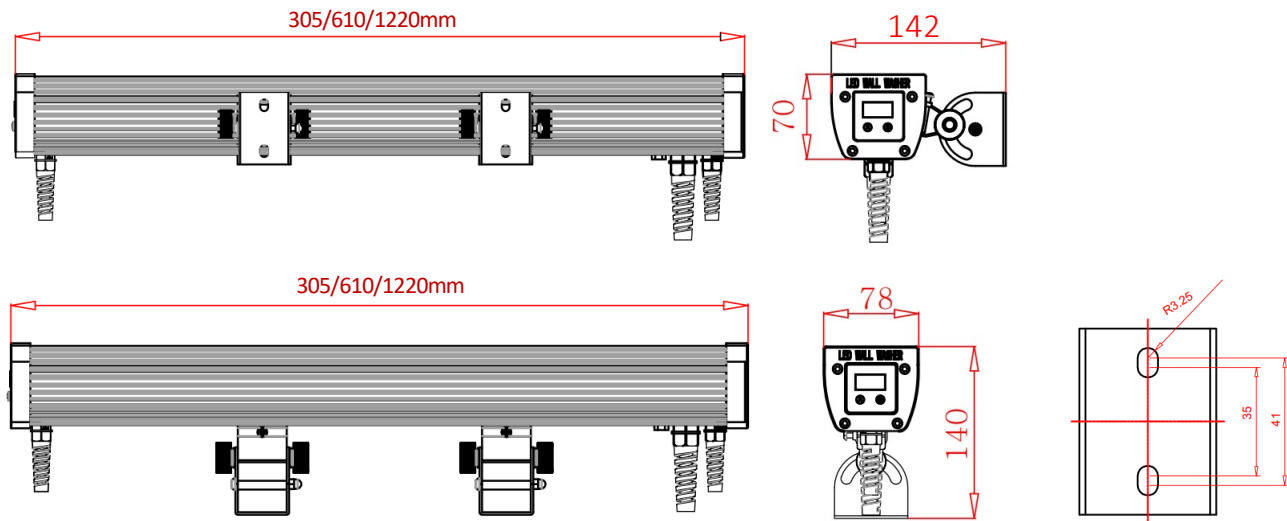


Installation

DMX



LS-CON-DMX-DE3
DMX CONTROLLER

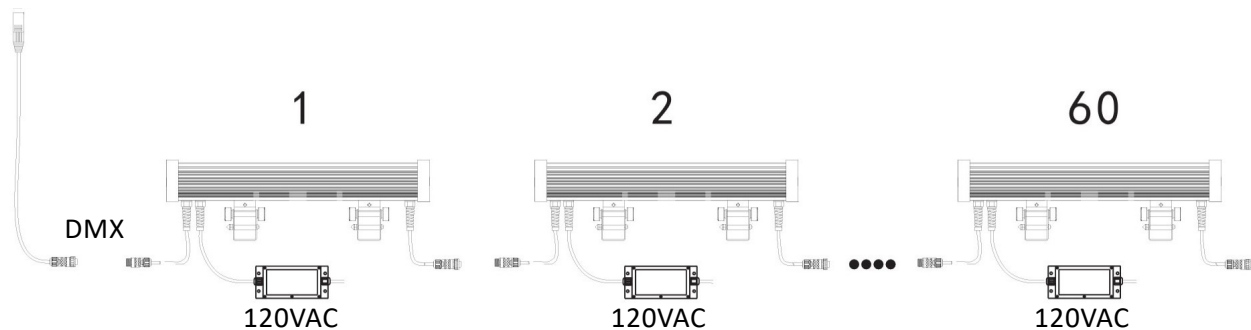



Client

Date

Qty

Project


Type

PO#

LS-ARCH-EXT-120V-LIN

Dimensions


1 couleur/0-10V:

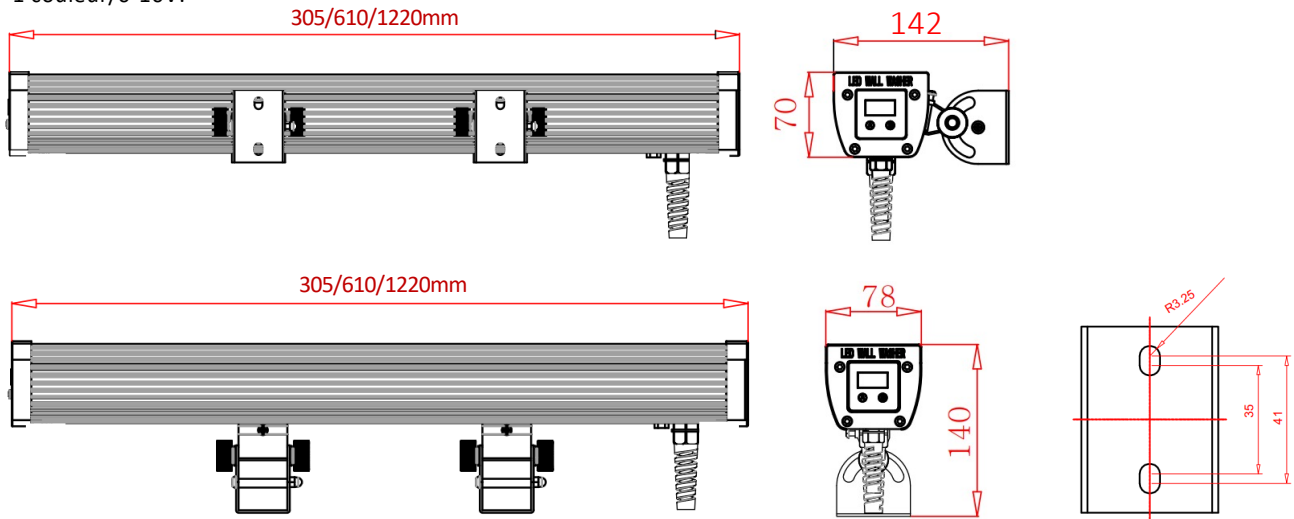


Installation

1 color


1



2




60




1 color (0-10V)


1



2



60





Client		Date		Qty	
Project		Type		PO#	

LS-ARCH-EXT-120V-LIN

Installing the brackets

