



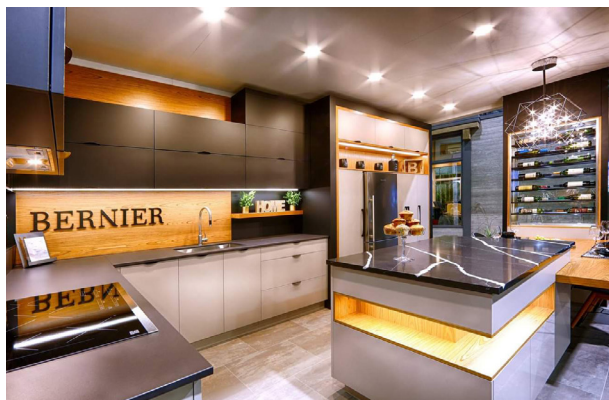

LED strip

LS-STRIP-24V-RGBW

24 V LED strip offering consistent brightness and long-lasting performance.
Made in Quebec - Canada

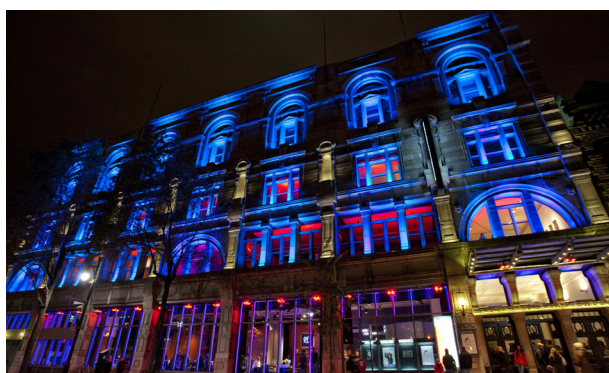

DESCRIPTION

CRI 90+ (BRIDGELUX CHIP)

SMD 2835

Power 400lm /ft - 4.5 lm/ft

Made in Canada

Lifetime: 50,000+ hours

Operating temperature: -40°C to 60°C

5 year warranty


3-Step MacAdam's ellipse, single binning

Reverse polarity protection

3 oz copper

Protection IP20 or IP65

DIMENSIONS

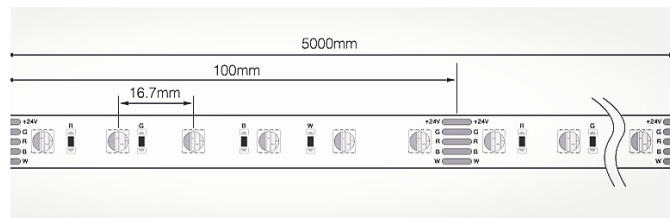

ORDER SHEET - 24V STRIP**1 STRIP**

LS-STRIP-24V- RGBW

2 LUMEN**3 CRI****4 CCT****5 PROTECTION****6 LENGTH****7 UNIT****8 INPUT WIRE****9 UNIT****10 OUTPUT WIRE****11 UNIT****Legend**

Refer to the corresponding number in the box for the information to be provided.

2

RGBW

3

• 90

4• 4 000 K
• On demand**5**• IP20
• IP65**6 8 10**

Specify the desired length.
For the input and output wires, you can specify: standard.

7 9 11

Select the unit of measurement for the length provided:

- Meters
- Inches
- Feet

PRODUCT SPECIFICATIONS

		24V- RGBW
COLOR TYPE		
CCT	K On demand	RGBW 4000K YES
POWER	W/m W/ft	14,76 4,5
LIGHT EFFICIENCY	lm/W lm/ft	1312,34 400
CRI		90+
AVAILABLE IN IP65+		YES
LED RIBBON CUTTING INCREMENT	mm inch	49 1,9
DIODE QTY	LED/m LED/ft	62 19
STRIP WIDTH	mm inch	10 0,39
MAX RUN LENGTH	m feet	9,75 32
LINK TO THE PRODUCT PAGE		

POWER SUPPLY

For more
options



MODEL

POWER SUPPLY

SPECIFICATIONS

LS-PSU-24V-xxW-5IN1



- 24 Volts and available in power ratings of 96, 150, 200 et 300 Watts,
- Line Voltage Dimming (Triac MLV & ELV),
- PWM,
- 0-10V (sinc & source),
- Dimmer (Built-in potentiometer),
- Protection against incorrect wiring,
- Class P & 2,
- Suitable for damp environments

LS-PSU-24V-DIM-xxW



- 24 Volts and available in power ratings of 40 et 80 Watts,
- Line Voltage Dimming (Triac),
- IP20,
- Protection against incorrect wiring,
- Class 2

LS-PSU-24V-120V/277V-xxW-IP67-B (0-10V)



- 24 Volts and available in power ratings of 100, 150, 240 et 320 Watts,
- 0-10V Dimming,
- IP67,
- Short-circuit protection,
- Class 1 div.2

CONTROL

For more
options




MODEL

CONTROL


SPECIFICATIONS

LS-CON-DMX -DE3



- Screen,
- 500 scenes,
- 10 zones,
- 1024 DMX channels,
- USB,
- Ethernet

LS-CON-DMX-DINA-R2-LITE



- Stand Alone controller
- 99 scenes,
- 5 zones,
- 3 DMX/RDM universes,
- DALI,
- USB,
- Ethernet

LS-CON-DMX-SLESA-U11



- 10 presets buttons,
- 99 scenes,
- 10 zones,
- 1024 DMX channels,
- USB,
- Ethernet,
- Clock and calendar

LS-CON-DEC-DMX-4S-6A



- 4-channel DMX decoder,
- Max 6A per channel

POPULAR PROFILES

For more
options





MODEL

PROFILE

DIMENSIONS


LS-EXT-SUR-16*13

- 10-foot segment




LS-EXT-SUR-CORNER

- 10-foot segment




LS-EXT-T.BAR-2528

- 10-foot segment



LS-EXT-ENC-22*13

- 10-foot segment



POPULAR FLEXIBLE NEONS

For more
options




MODEL

PROFILE

DIMENSIONS


LS-EXT-NEON-SIDE-16*16

- 10-foot segment





LS-EXT-NEON-TOP-16*16

- 10-foot segment




LS-EXT-NEON-TOP-20*20

- 10-foot segment



Why | Pourquoi

BOREALUX

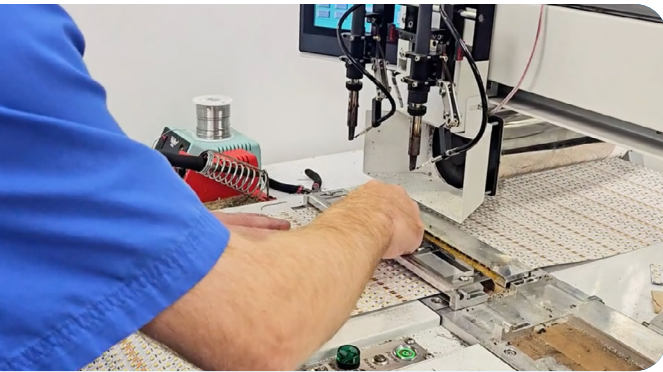

- ✓ 100% Canadian LED manufacturer
- ✓ 5 year warranties
- ✓ Very fast delivery
- ✓ Very high custom production capacity



- ✓ Manufacturier DEL 100 % Canadien
- ✓ Garanties de 5 ans
- ✓ Livraison très rapide
- ✓ Capacité très élevée de production sur mesure



Contact Us

Contactez-nous

- ☎ 1-888-540-4713
- ✉ vi@borealux.com
- 📍 670 rue Bouvier, Suite 108,
Quebec, Canada G2J 1A7

BOREALUX.COM



Discover all our products | Découvrez tous nos produits